

DESCRIPTION


The A-3248DME-AS is a high cost-performance mixer power amplifier suited for broadcasting paging or background music in schools, offices, shops, factories, mosques, churches and large rooms.

SPECIFICATIONS

* 0 dB = 1 V

Power Source	100 - 240 V AC ~ 50/60 Hz
Power Consumption (EN60065)	99 W (AC operation at 1/8 maximum output without clip)
Rated Output	480 W
Input	MIC 1 : 1 mV (-60 dB*), 600 Ω, balanced, phone jack, selectable to RJ45 MIC 2 - 5 : 1 mV (-60 dB*), 600 Ω, balanced, phone jack AUX 1 : 100 mV (-20 dB*), 10 kΩ, unbalanced, RCA pin jack AUX 2 : 100 mV (-20 dB*), 10 kΩ, unbalanced, RCA pin jack MP3 : LED Display, Support USB, SD/MMC Card (up to 32 GB), Bluetooth, Radio FM, Record
Output	Speaker Out: Speaker output in screw type terminal Direct Line (selectable): 21 Ω (100 V) or 4 Ω Rec Out: 0 dB*, 600 Ω, unbalanced, RCA pin jack
Phantom Power	DC +21 V (MIC 1)
S/N Ratio	Over 60 dB
Total Harmonic Distortion	Under 1% at 1 kHz, 1/3 rated power
Muting	MIC 1: Mutes other input signal by 0 - 30 dB attenuation
Frequency Response	50 - 20000 Hz
Tone Control	± 10 dB at 80 Hz, 315 Hz, 1 kHz, 3.15 kHz, 8 kHz
Indicator	POWER, SIGNAL, PEAK, PROTECT
Operating Temperature	0 °C to +40 °C
Ventilation	Fan Cooling
Finish	Panel: ABS Resin, Black Case: Steel Plate, Black
Dimensions	420 (W) X 100.9 (H) X 357 (D) mm (16.54" X 3.97" X 14.06")
Weight	5.0 kg (11.02 lb)

APPEARANCE

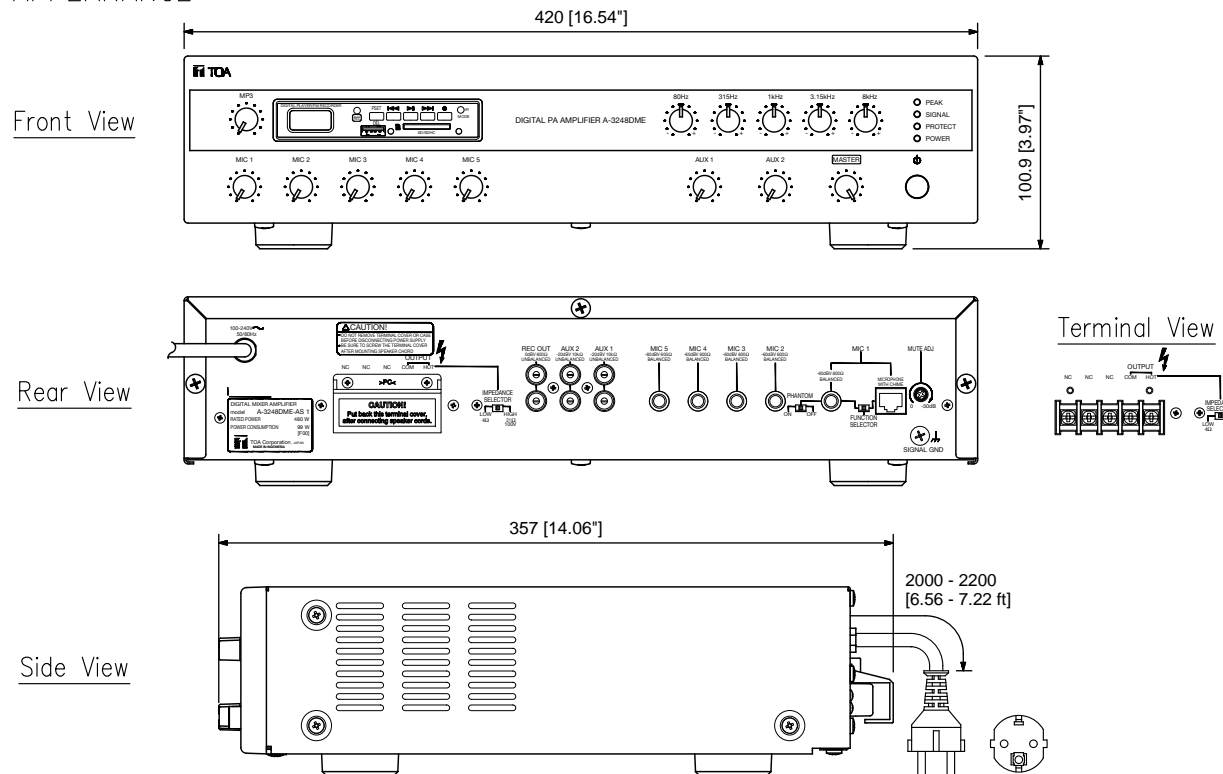

UNIT : mm SCALE : 1/4

SEP/09/2019

TOA Corporation

DWG No: 506419028