

The SC-630M is a compact, highly intelligible speaker suited to public address announcement applications. Its external speaker component finished with powder coating, and stainless steel bracket and screws ensure the unit's weatherproof capability.




Order no: SC-630M EU

Specifications



Frequency response	250 Hz - 10 kHz
Connection	Cable with two wires
Sensitivity (1#V, 1#m) (combined)	113 dB
Rated input	30 W
Tappings	30 / 15 / 10 / 5 W (70 V) 30 / 15 / 7.5 / 5 / 2.5 W (100 V)
Dimensions (W x H x D)	285 x 227 x 277 mm
Dimensions (ø x D)	x 277 mm
Finish	Aluminium, powder coating, off-white (RAL 9010 or equivalent)
Operating temperature	-20 °C to +55 °C (must be free from dew condensation)

Appearance

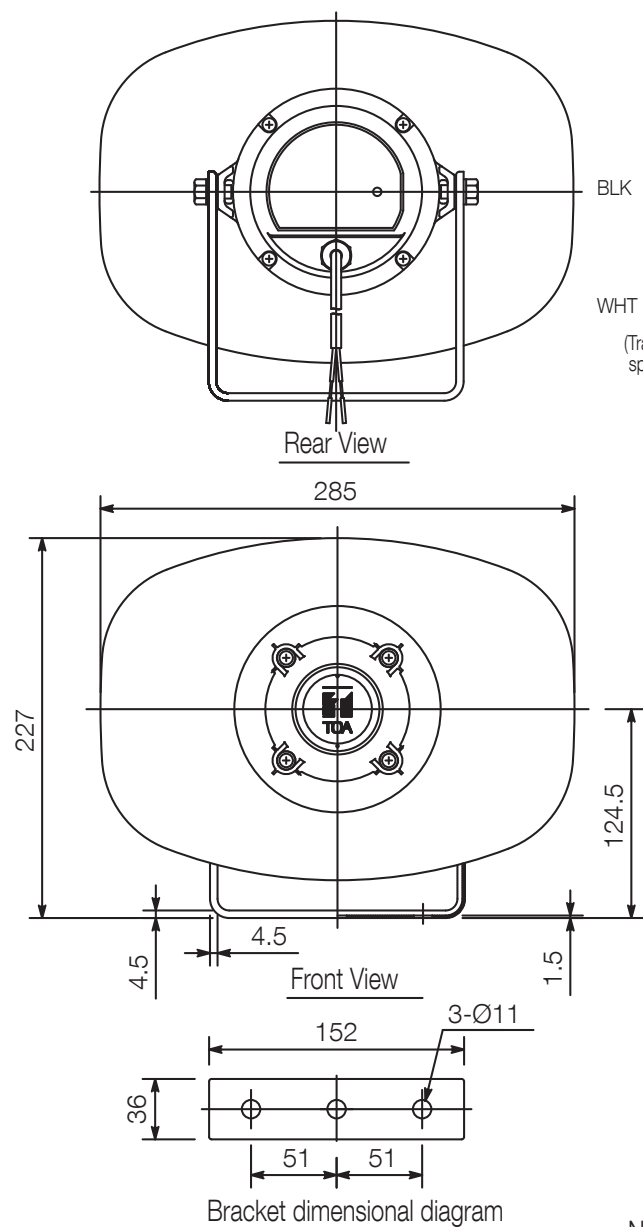

UNIT:mm

SCALE:1/5

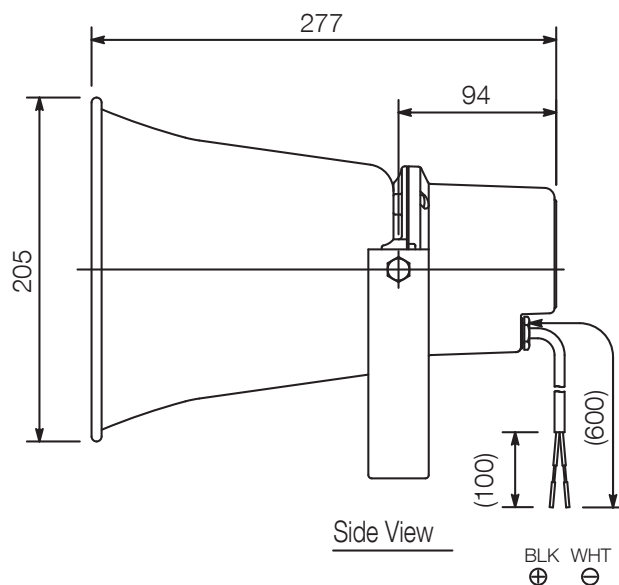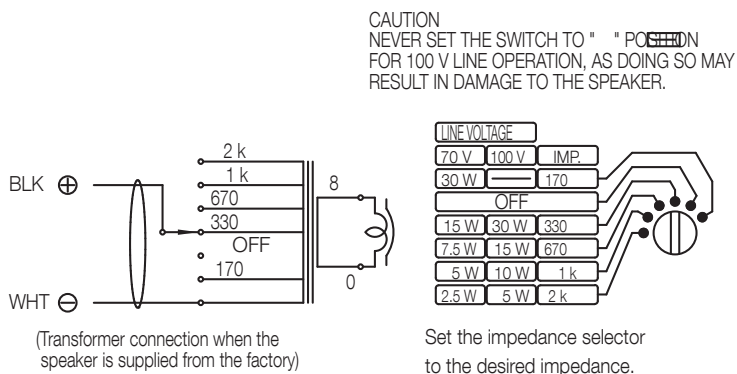

Note: Numerical values in parentheses are for reference only.