



SPECIFICATIONS

Rated Input	10 W (50 V, 70 V, 100 V Line)
Input Impedance	100 V Line : 1 k Ω (10 W), 2 k Ω (5 W), 4 k Ω (2.5 W) 70 V Line : 500 Ω (10 W), 1 k Ω (5 W), 2 k Ω (2.5W), 4 k Ω (1.25 W) 50 V Line : 250 Ω (10 W), 500 Ω (5 W), 1 k Ω (2.5 W), 2 k Ω (1.25 W), 4 k Ω (0.63 W)
Preset Impedance	1 k Ω
Sound Pressure Level	92 dB (1 m, 1 W) at 1 kHz
Speaker Diameter	12 cm
Frequency Range	65 ~ 15,000 Hz
Finish	Cabinet, Cover : ABS Resin, Off-White Bracket : SPCC, Off-White
Dimensions (W×H×D)	160(6.30") × 200(7.87") × 195(7.68") mm
Weight	1.8 kg (3.97 lb.)


APPEARANCE

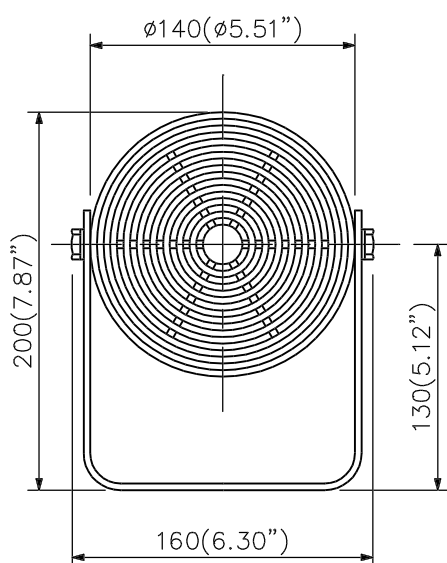


Front View

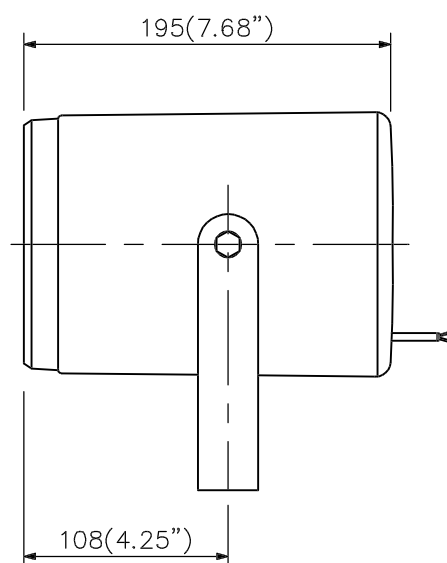

Side View

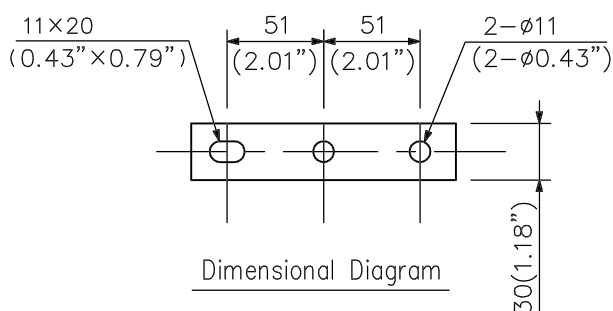

Dimensional Diagram

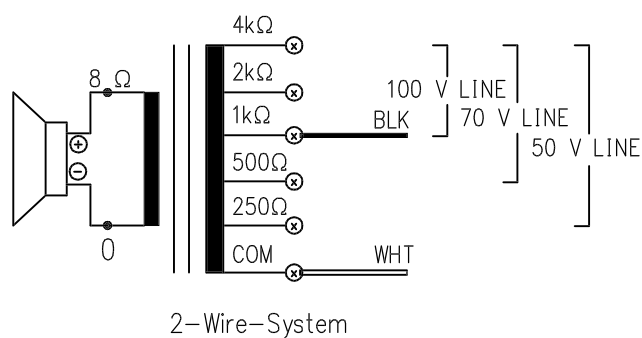

2-Wire-System

UNIT:mm SCALE: 1/4