

# RM-300X

VOIR REF RM-300X C01



Article number: RM-300X


## Specifications

|                        |   |
|------------------------|---|
| Power source           | 24 V DC (Operation range: 15 - 40 V DC)   |
| Frequency response     | 100 Hz - 20 kHz   |
| Distortion             | < 1 %   |
| Current consumption    | 240,0 mA max.   |
| S/N ratio              | 60 dB   |
| Audio output           | 0 dBV, 600 Ω, balanced  |
| Inputs                 | 3.5 mm phone jack, for AUX (-20 dBV) or Mic (-40 dBV)   |
| Controls               | 1 emergency button, 13 free assignable function buttons, 1 talk button, volume microphone, volume speaker |
| Indicator              | 2 LEDs per function button, one of them 3-colour LED (green/yellow/red)                                   |
| Key extension          | 7   |
| Microphone type        | Elektret-condensor  |
| Directivity            | Cardioid  |
| Dimensions (W x H x D) | 190 x 76,5 x 215 mm   |
| Dimensions (ø x D)     | x 215 mm  |
| Finish                 | ABS resin, black,   |
| Operating humidity     | 35% - 80%   |
| Operating temperature  | 0°C - 40°C  |

# RM-300X

VOIR REF RM-300X C01

## Appearance

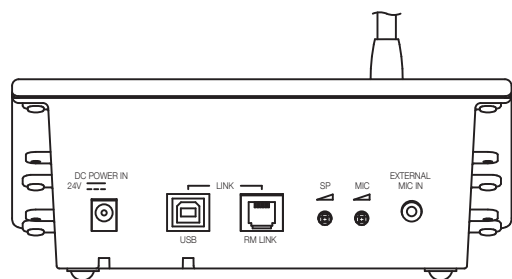

Rear View


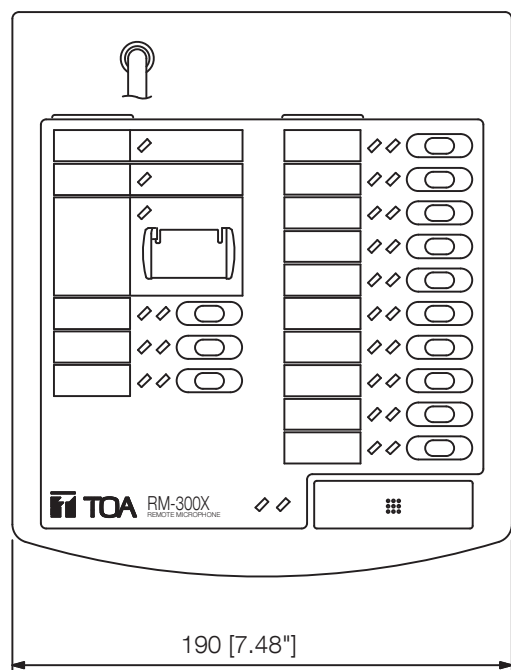


Figure as viewed  
from point A

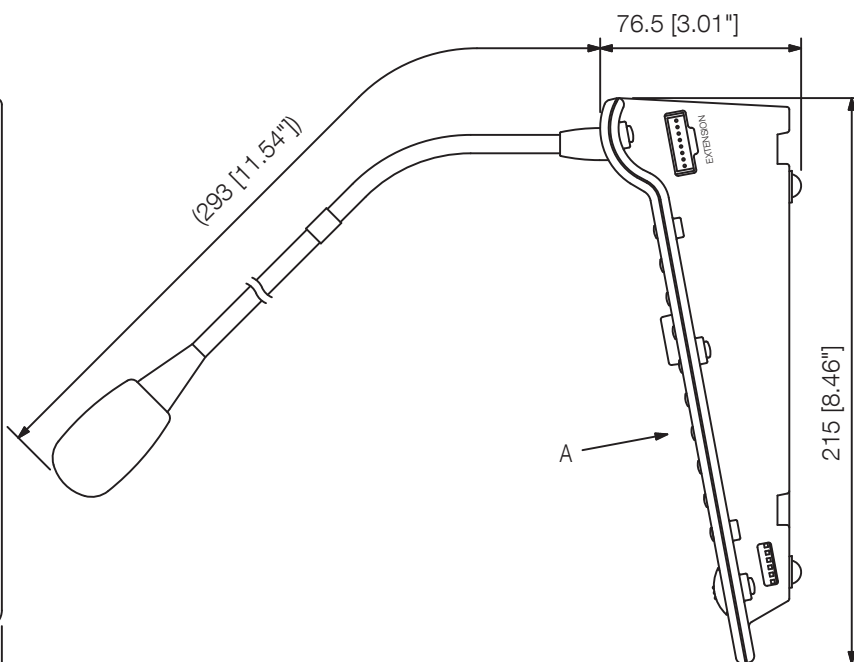

Side View

UNIT:mm

SCALE:1/3

Note: Numerical values in parentheses are for reference only.